



XGUARD

WIRELESS PORTABLE ALARM

Chime mode: sounds the zone number that has been triggered

Alarm mode: activates a continuous tone

Add up to 6 wireless detectors

Transmitter buttons provide optional connection to gate, garage or panic


Monitoring status of detectors and charge

Wireless detectors for convenient installation

150 metres open air wireless range

Rechargeable NiMH batteries provide 20 hour standby use

Simple to configure and use

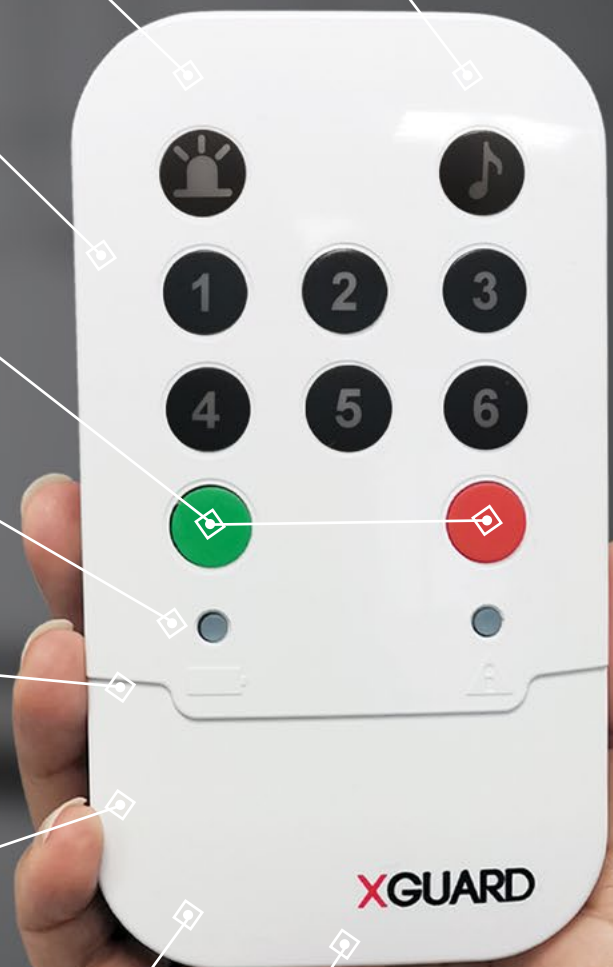

Wide angle detector 12 x 15m



Narrow angle detector 24 x 2m

Compatible with all OPTEX Xwave detectors www.idsprotect.com





Approximate 150 metre open air wireless range




WLX-40 12 x 15m




WLX-80 24 x 2m

Detector range
Top view - WLX -40



Detector range
Side view - WLX -80



Approximate 18 month detector battery life (CR123), weatherproof IP 54 rated

Ordering codes

- 860-604-001 XGuard
- 902-604-KIT1 XGuard with 1 x Xwave WLX-40 detector
- 902-604-KIT2 XGuard with 1 x Xwave WLX-80 detector
- 862-01-WLX-40 XWave WLX 40 wireless outdoor PIR, single pyro, 12 x 15m
- 862-01-WLX-80 XWave WLX 80 wireless outdoor PIR, single pyro, 24 x 2m
- 862-01-CA1W Wall mount bracket

91 Escom Road • New Germany • 3610 • South Africa • P O Box 738 • New Germany • 3620 • South Africa

Tel: +27 (0)31 705 1373 • Fax: +27 (0)31 705 4445 • email: info@idsprotect.com • www.idsprotect.com

INHEP ELECTRONICS HOLDINGS (Pty) Ltd Reg. No. 2007/002578/07

E&OE